




GLUE DOWN
VINYL PLANKS

3MM VINYL PLANK

Serfloor 3mm Glue Down vinyl planks are a versatile wood look range that can be used for all commercial and domestic environments. With the ability to customise laying patterns, our 3mm vinyl range offers the look and feel of real timber flooring without the higher price point or maintenance requirements.

The planks are 100% water resistant and designed for durability and low maintenance, it is fit for almost any indoor flooring requirement including all wet areas. It is also scratch and stain resistant, making it suitable for busy homes with pets and young children.

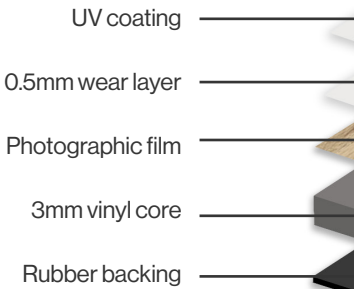

Comfortable under Foot



Low VOC Emission



Water Resistant



Scratch and Stain Resistant






Antibacterial and Hypoallergenic



Easy to Maintain

- Water resistant
- Low VOC emissions contribute to better indoor air quality
- UV coated
- Anti-bacterial surface
- Fire, slip, oil & stain resistant
- 15 years commercial warranty
- 30 years residential warranty
- Reduces impact & sound travel
- Durable & low maintenance
- Quick & easy installation
- Best choice for allergy sufferers
- Designed for no underlay
- Pet and kid friendly
- Dry-back. Hard set vinyl adhesive required for installation
- Suitable for all wet areas including the bathroom, laundry and kitchen

	Standard	RESULT 3MM
Total Thickness (mm)	EN 428	3.0mm
Thickness of Wear Layer (mm)	EN 429	0.5mm (+/- 0.005)
Weight (+/- 50gr/m2)	EN 430	5.67kg/m2
Plank Dimension	EN 427	184.2mm x 1219.2mm
Packing	EN 427	14 Planks / 3.14m2 per box
Dimension Stability	EN 434	<0.25
Colour Fastness to Light	ISO 105 B02	> 6
Residual Indentation	EN 433	> 0.10mm
Acoustic	ISO 717-2:2013	56 dB
Abrasion Resistance	EN 660-2	5.3
Slip Resistance Classification	AS 4586-2013	R10 (>10 <19)
Behaviour to Fire	AS/ISO 92391-2003	CRF Value: 8.3Kw/M2
		Smoke Value: 146%.min
Emission of Formaldehyde	EN 717-2	Not detected
TVOC Emission Factor	ISO 10580	After 24 hours: .22 m2.m3
Chemical Products	ASTM F925	Pass
Electric Behaviour	EN 1081	Pass
Dynamic Coefficient of Friction	ASTM C1028	Direction A: 0.48 / Direction B: 0.58
Surface Treatment	Anti-bacterial	Anti-bacterial, UV protection

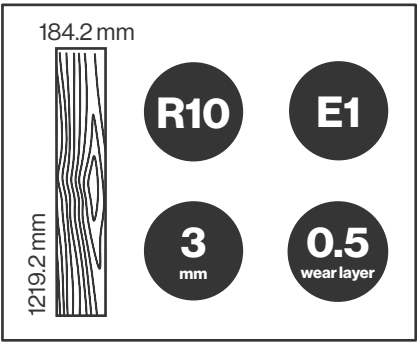

FRENCH OAK SFG-3207



SPOTTED GUM SFG-3102



NSW SPOTTED GUM SFG-3103



SILVER OAK SFG-3104



DARK ASH SFG-3201



WESTERN CHARCOAL SFG-3202



2MM VINYL PLANK



Serfloor 2mm Glue Down vinyl planks are an affordable and elegant option with realistic wood look designs and the choice to customise your laying pattern. It has been designed for easy and fast installation over almost any surface without underlay.

Serfloor glue down flooring is installed with vinyl adhesive which keeps movement in the floor to a minimum when exposed to extreme temperatures, and requires no expansion gaps.

- UV coating
- 0.3mm wear layer
- Photographic film
- 2mm vinyl core
- Rubber backing



Comfortable under Foot



Low VOC Emission



Water Resistant



Scratch and Stain Resistant



Antibacterial and Hypoallergenic



Easy to Maintain

- Water resistant
- Low VOC emissions contribute to better indoor air quality
- UV coated
- Anti-bacterial surface
- Fire, slip, oil & stain resistant
- 15 years commercial warranty
- 30 years residential warranty
- Reduces impact & sound travel
- Durable & low maintenance
- Quick & easy installation
- Best choice for allergy sufferers
- Designed for no underlay
- Pet and kid friendly
- Dry-back. Hard set vinyl adhesive required for installation
- Suitable for all wet areas including the bathroom, laundry and kitchen

	Standard	RESULT 2MM
Total Thickness (mm)	EN 428	2.0mm
Thickness of Wear Layer (mm)	EN 429	0.3mm (+/- 0.005)
Weight (+/- 50gr/m2)	EN 430	3.79kg/m2
Plank Dimension	EN 427	184.2mm x 1219.2mm
Packing	EN 427	20 Planks / 4.49m2 per box
Dimension Stability	EN 434	<0.25
Colour Fastness to Light	ISO 105 B02	> 6
Residual Indentation	EN 433	> 0.10mm
Acoustic	ISO 717-2:2013	56 dB
Abrasion Resistance	EN 660-2	5.3
Slip Resistance Classification	AS 4586-2013	R10 (>10 <19)
Behaviour to Fire	AS/ISO 92391-2003	CRF Value: 8.3Kw/M2 Smoke Value: 146%.min
Emission of Formaldehyde	EN 717-2	Not detected
TVOC Emission Factor	ISO 10580	After 24 hours: .22 m2.m3
Chemical Products	ASTM F925	Pass
Electric Behaviour	EN 1081	Pass
Dynamic Coefficient of Friction	ASTM C1028	Direction A: 0.48 / Direction B: 0.58
Surface Treatment	Anti-bacterial	Anti-bacterial, UV protection



ENGLISH OAK SFG-2101



CARAMEL SFG-2102



CHOCOLATE SFG-2103






SNOWY OAK SFG-2201



GOLDEN OAK SFG-2202



WEATHERED OAK SFG-2203

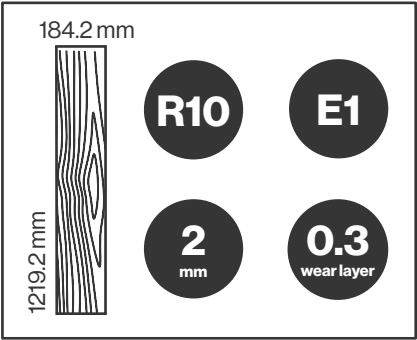

Colour and Pattern Reproduction

Serfloor photography and print cannot always produce a perfect representation of our product. This includes the appearance of colour, pattern variation and installation elements used. For this reason, we strongly recommend you obtain a product sample and view the product in a larger display where possible, to see the flooring design in a large-scale setting before purchase and installation. Just like real timber, the patterns in our products can have natural variations.

The colour and pattern trends do change and in order to continue supplying our customers with the latest colours and styles, products and colours are sometimes discontinued. If this happens, we will always do our best to help you find a colour and pattern you will love just as much.

We suggest visiting our website for information about installation, care and maintenance www.serfloor.com.au

If you don't find what you are looking for or require more information, please contact us directly.

SER FLOOR
AUSTRALIA

info@serfloor.com.au | (03) 9796 4626
www.serfloor.com.au

Follow us at [@serflooraustralia](https://www.instagram.com/serflooraustralia)



Back cover: Golden Oak SFG-2202 | Front cover: Snowy Oak SFG-2201