




HYBRID CLICK LOCK

LONGBOARD AND HERRINGBONE

HYBRID CLICK LOCK

Serfloor's Engineered Hybrid Click Lock range is a revolutionary flooring system composed of a combination of natural limestone and PVC powder, which ensures dimensional stability. The key features of this range include the Uniclic® system and the acoustic backing, making it an ideal choice for your next commercial project.

Backed with a 30 year residential and 15 year commercial wear warranty, it is an ideal option for high traffic areas for both your home and workplace. All these features will guarantee you enjoy a beautiful floor for many years to come.

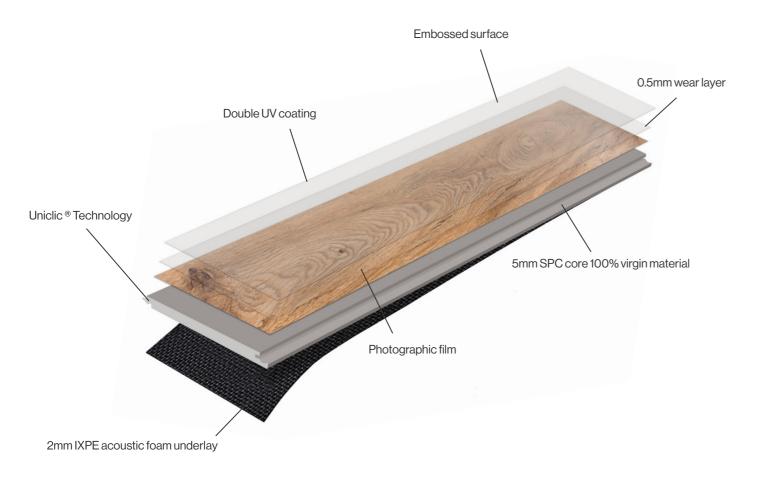

- Low VOC emissions contributing to better indoor air quality
- Double UV Coating
- Fire, slip, oil & stain resistant
- Reduces impact & sound travel
- Antibacterial

- Durable & low maintenance
- Quick & easy installation
- Pet and kid friendly
- Designed for no extra underlay
- Virgin Material

- Suitable for under floor heating
- Best choice for allergy sufferers
- Water Resistant
- Suitable for all wet areas including the bathroom, laundry and kitchen
- Uniclic System

Hybrid Longboard

With 18 realistic wood designs to choose from, Serfloor's Engineered Hybrid Longboard will bring both elegance and sophistication to any space of your home or workplace. The extra long plank size is guaranteed to open up and enhance the look of your room.



Hybrid Herringbone

Offering 4 stunning traditional colours, Serfloor's Hybrid Herringbone creates an artistic and elegant appearance within your space. With its ideal plank size, consisting of an A and B click, Serfloor's Hybrid Herringbone will add luxury and class to any area.





HYBRID CLICK LOCK

LIMESTONE CORE

The composition of our Hybrid Click Lock makes it the best option compared to vinyl, timber laminate or engineered timber.

- Silica free
- Dimensionally stable compared to timber or vinyl
- 100% water resistant
- Easy to cut with a stanley knife
- Impact resistant
- Suitable for most under floor heating
- Virgin material

PROTECTIVE WEAR LAYER

Serfloor's Hybrid Click Lock is designed for everyday use and is a perfect solution for any area of your residential home or commercial space.

- Double UV protection
- Scratch resistant, making it suitable for kids and pets
- Most stains can be removed quickly without leaving traces, including permanent marker
- 30 year Residential wear warranty
- 15 year Commercial wear warranty



COMMERCIAL GRADE

With a 0.5mm wear layer and double UV protection, you can rest assured that this product is a perfect option for your next commercial project.


- 0.5mm wear layer
- 15 year commercial wear warranty
- 100% water resistant
- Softer underfoot compared to ceramic tiles or timber floors
- Easy to maintain and keep clean

ACOUSTIC PROPERTIES

With great acoustic properties, Serfloor's Hybrid Click Lock is suitable for use in all apartment buildings.

- Sound insulation rating of 46 (L'nT,w)
- 2mm IXPE acoustic foam underlay
- Suitable for use in apartment buildings without the need for extra underlay
- Reduces impact sound when walked on
- No tapping sound compared to timber laminate



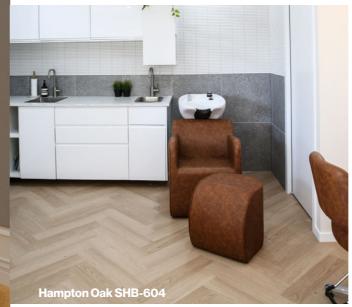



CUSTOM STAIR NOSE

Serfloor Australia is one of the first suppliers in Australia to introduce custom made stair nosing produced in house from our own hybrid longboard planks.

- Perfect match to your floor
- Clicks into your floor for a seamless finish
- Made to order to ensure same batch
- R10 / P3 slip rated
- Availble in 50mm square nose or flush stair nose
- 1.4m length stair nose

FLOATING FLOOR

With its patented click system, Serfloor's Hybrid Click Lock range is designed to be installed without glue, making it easy to install and repair.

- No adhesive required during installation
- Expansion gap required, can be covered with Serfloor's matching waterproof scotia
- Must be able to move freely, without heavy weight on top (such as kitchen benches, piano, or heavy bookshelves)

WATER RESISTANT

The composition of our Hybrid Click Lock in combination with the Uniclic system makes this product perfect for wet areas.

- 100% water resistant
- Suitable for use in all wet areas including the bathroom, kitchen and laundry
- Water tight joins
- Matching waterproof scotia suitbale for use in wet areas

UNICLIC® TECHNOLOGY

The combination of the Uniclic Technology and micro-bevelled edges ensures you enjoy a beautiful floor for many years to come.

- Strongest click system in the market
- Widthstands greater forces in comparison to other click systems
- Designed for commercial applications
- Seamless joins
- Certified manufacturer of the Uniclic patent





EUROPEAN COLLECTION
























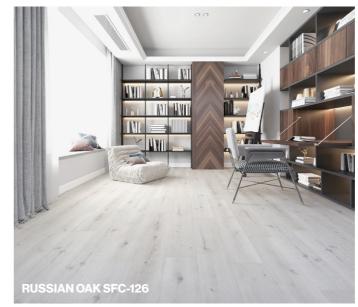



CONTEMPORARY COLLECTION

























HOMESTEAD COLLECTION



























HERRINGBONE

















SPECIFICATIONS

Danish Oak SFC-121

CHANEL







	Hybrid Longboard		Hybrid Herringbone	
	Standard	Result	Standard	Result
Total Thickness (mm)	EN 428	7.0mm (including 2mm thick IXPE foam underlay)	EN 428	7.0mm (including 2mm thick IXPE foam underlay)
Thickness of Wear Layer (mm)	EN 429	0.5mm (+/- 0.005)	EN 429	0.5mm (+/- 0.005)
Weight (+/- 50gr/m2)	EN 430	10.72kg/m2	EN 430	10.72kg/m2
Plank Dimension	EN 427	1800mm x 228mm	EN 427	640mm x 128mm
Packing	EN 427	5 Planks/2.052 m2 per box	EN 427	16 Planks / 1.31 m2 per box
Dimension Stability	EN 434	Shrinkage 0.02%; Curling 0.2mm	EN 434	Shrinkage 0.02%; Curling 0.2mm
Colour Fastness to Light	ISO 105 B02	>6	ISO 105 B02	>6
Acoustic	ASTME 492-09	L'nT,w = 46	ASTM E 492-09	L'nT,w = 46
Residual Indentation	EN 433	>6	EN 433	>6
Castor Chair Test	ISO 4918	No change / delamination	ISO 4918	No change / delamination
Flexibility	EN 435	Pass	EN 435	Pass
Abrasion Resistance	ASTMD3884	<0.015g	ASTM D3884	<0.015g
		R10	AS 4586-2013	R10
Behaviour to Fire	AS/ISO 9239.1-2003	CHF value: >11Kw/M2	AS/ISO 9239.1-2003	CHF value: >11Kw/M2
Chemical Products	ASTMF925	Pass	ASTM F925	Pass
Electric Behaviour	EN 1081	Pass	EN 1081	Pass
Emission of Formaldehyde	ASTM D5116-2010 (<10 µg.m2h)	0.0013mg	ASTM D5116-2010 (<10 µg.m2h)	0.0013mg
TVOC Emission Factor	ASTM D5116-2010 (24h) μg/m2h	17.6	ASTM D5116-2010 (24h) µg/m2h	17.6
Embossing	Regular/ Deep/ Wild	Deep	Regular/ Deep/ Wild	Deep
Product Density	EN 436	2000kg/m3	EN 436	2000kg/m3
Stability Test	<0.25%	Pass / 0.06%	<0.25%	Pass / 0.06%
Curling Test	<1.0mm	0.65mm	<1.0mm	0.65mm
Squareness	<0.25	0.11	<0.25	0.11
Straightness	<0.25	0.08	<0.25	0.08
Peel Strength	>5.5kg	11.6kg	>5.5kg	11.6kg
Click Strength	>10Kg	19.8Kg	>10Kg	19.8Kg
Impact Test	<10mm	<5.5mm	<10mm	<5.5mm
Adhesive		Not required		Not required

















Foot

Comfortable Under Low VOC Emission

Scratch and Stain Resistant

Antibacterial and Hypoallergenic

Easy to Maintain



Serfloor photography and print cannot always produce a perfect representation of our product. This includes the appearance of colour, pattern variation and the presentation of the installation. We strongly recommend you obtain a product sample and view the product in a larger display where possible.











