

Australian Wool Testing Authority Ltd - trading as AWTA Product Testing A.B.N 43 006 014 106

1st Floor, 191 Racecourse Road, Flemington, Victoria 3031 P.O Box 240, North Melbourne, Victoria 3051 Phone (03) 9371 2400 Fax (03) 9371 2499


## **TEST REPORT**

Client :		tralia Pty Ltd		Test Number		17-00131	
	3/237 Prince	• •		Issue Date	:	18/04/201	
	Hallam VIC	3803		Print Date	:	19/04/201	7
Sample D	Description	Clients Ref : "Vinyl Plank	Tile SF-6051 "				
		End Use : Flooring					
		Nominal Composition : PV		•			
		Nominal Mass per Unit Area/Density : 8.3kg/m2 Nominal Thickness : 5mm					
		Nominal Inickness : 5n	าท				
/ISO 9239.	1-2003	Reaction to Fire Tests for Flo Radiant Heat Source	oorings. Determinatio	on of the Burning Be	havio	our using a	
		Radiant Heat Source					
		Date of Sample Arrival 22/03/2017					
		Date Tested	13/04/2017				
		CHF Value	1	2 3	3	Mean	
					9	6.7	kW/m
		Length	6.5	6.7 6.	•		
		Length Width	6.5 7.1	6.7 6. -	-	-	kW/m
		-		6.7 6. -	-	-	kW/m
		Width Smoke Value		6.7 6. - 2 3	-	- Mean	kW/m
		Width Smoke Value Length	7.1	-	- }	- Mean 165	kW/m <sup>*</sup> %.min
		Width Smoke Value	7.1	2	- }		
		Width Smoke Value Length	7.1 1 166	2	- }		%.mir

conditions of the test, they are not intended to be sole criterion for assessing the potential fire hazard of the product in use.

Sample was conditioned in accordance with BSEN 13238:2001 at a temperature of 23±2°C and relative humidity of 50±5% for a minimum of 48 hours prior to testing.

Each specimen was clamped to a substrate of 6mm thick fibre reinforced cement board prior to testing.

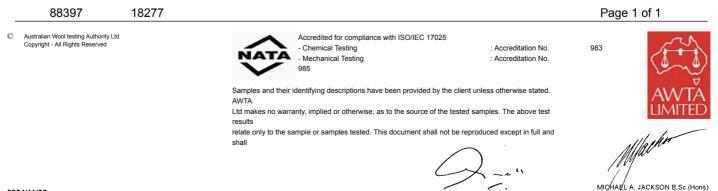

MANAGING DIRECTOR

Α